
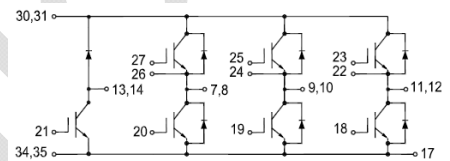


GT100PI120T6H-M

IGBT Module


Features:

- Field Stop Trench Gate IGBT
- Short Circuit Rated > 10 μ s
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested (2 \times I_c)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

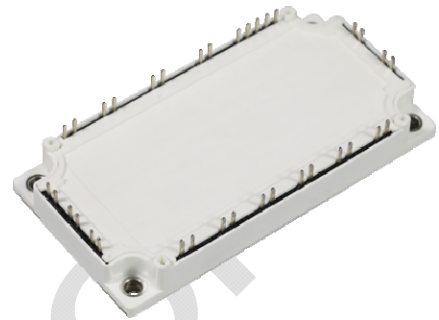

Applications:

- Industrial Inverters
- Servo Applications

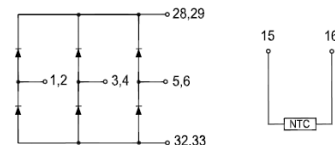

IGBT, Inverter

Maximum Rated Values (T_C=25 $^{\circ}$ C unless otherwise specified)

V _{CES}	Collector-Emitter Blocking Voltage		1200	V
V _{GES}	Gate-Emitter Voltage		\pm 20	V
I _c	Continuous Collector Current	T _C =100 $^{\circ}$ C	100	A
		T _C =25 $^{\circ}$ C	200	A
I _{CM}	Peak Collector Current Repetitive	T _J =175 $^{\circ}$ C	200	A
t _{SC}	Short Circuit Withstand Time		>10	μ s
P _D	Maximum Power Dissipation (IGBT)	T _C =25 $^{\circ}$ C T _{Jmax} =175 $^{\circ}$ C	714	W

Electrical Characteristics of IGBT ($T_C=25^\circ\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min	Typ	Max	Unit
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=1\text{mA}, V_{CE}=V_{GE}$	5.0	5.5	6.6	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=100\text{A}, V_{GE}=15\text{V}$	$T_J=25^\circ\text{C}$	1.70	2.00	V
			$T_J=125^\circ\text{C}$	1.90		V
			$T_J=150^\circ\text{C}$	1.90		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0\text{V}, V_{CE}=V_{CES}, T_J=25^\circ\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=\pm 20\text{V}, V_{CE}=0\text{V}, T_J=25^\circ\text{C}$			200	nA
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		8.03		nF
C_{oes}	Output Capacitance			1.22		nF
C_{res}	Reveres Transfer Capacitance			0.59		nF

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600\text{V}, I_C=100\text{A}, R_{Gon}=1\Omega, V_{GE}=\pm 15\text{V}, \text{Inductive Load}$	$T_J=25^\circ\text{C}$		228		ns		
			$T_J=125^\circ\text{C}$		250				
			$T_J=150^\circ\text{C}$		254				
t_r	Rise Time		$V_{CC}=600\text{V}, I_C=100\text{A}, R_{Goff}=1\Omega, V_{GE}=\pm 15\text{V}, \text{Inductive Load}$	$T_J=25^\circ\text{C}$		63		ns	
				$T_J=125^\circ\text{C}$		67			
				$T_J=150^\circ\text{C}$		69			
$t_{d(off)}$	Turn-off Delay Time			$V_{CC}=600\text{V}, I_C=100\text{A}, R_{Goff}=1\Omega, V_{GE}=\pm 15\text{V}, \text{Inductive Load}$	$T_J=25^\circ\text{C}$		269		ns
					$T_J=125^\circ\text{C}$		279		
					$T_J=150^\circ\text{C}$		284		
t_f	Fall Time	$V_{CC}=600\text{V}, I_C=100\text{A}, R_{Gon}=1\Omega, V_{GE}=\pm 15\text{V}, \text{Inductive Load}$			$T_J=25^\circ\text{C}$		184		ns
					$T_J=125^\circ\text{C}$		291		
					$T_J=150^\circ\text{C}$		317		
E_{on}	Turn-on Switching Loss		$V_{CC}=600\text{V}, I_C=100\text{A}, R_{Gon}=1\Omega, V_{GE}=\pm 15\text{V}, di/dt=1387\text{A}/\mu\text{s}(T_J=150^\circ\text{C}), \text{Inductive Load}$		$T_J=25^\circ\text{C}$		3.1		mJ
					$T_J=125^\circ\text{C}$		4.3		
					$T_J=150^\circ\text{C}$		4.8		

E _{off}	Turn-off Switching Loss	V _{CC} =600V, I _C =100A, R _{Goff} =1Ω, V _{GE} =±15V, du/dt=4448V/μs(T _J =150°C), Inductive Load	T _J =25°C	5.28	mJ
			T _J =125°C	8.33	
			T _J =150°C	9.30	
Q _g	Total Gate Charge	V _{GE} =+15V...-15V	T _J =25°C	745	nC
R _{g internal}	Internal Gate Resistance		T _J =25°C	7.5	Ω
RBSOA	I _C =200A, V _{CC} =1050V, V _p =1200V, R _{Goff} =1Ω, V _{GE} =+15V to 0V, T _J =150°C			Trapezoid	
SC data	V _{CC} =600V, t _p =10us, V _{ge} =+/-15V, R _{Gon} =1ohm, R _{Goff} =1ohm, T _J =25°C			575	A
R _{θJC}	IGBT Thermal Resistance: Junction-To-Case			0.21	°C/W

Diode, Inverter

Maximum Rated Values (T_C = 25°C unless otherwise specified)

V _{RRM}	Repetitive Peak Reverse Voltage	1200	V
I _F	Diode Continuous Forward Current	100	A
I _{FM}	Peak FWD Current Repetitive	200	A

Electrical Characteristics of FWD (T_C=25°C unless otherwise specified)

Symbol	Description	Conditions	Min	Typ	Max	Unit
V _{FM}	Forward Voltage	I _F =100A	T _J =25°C	1.70		V
			T _J =125°C	1.80		
			T _J =150°C	1.80		
t _{rr}	Reverse Recovery Time	I _F =100A, -diF/dt =1911A/μs(T _J =150°C), V _R =600V, V _{GE} =-15V	T _J =25°C	260		ns
			T _J =125°C	396		
			T _J =150°C	454		
I _{rr}	Peak Reverse Recovery Current	V _R =600V, V _{GE} =-15V	T _J =25°C	92		A
			T _J =125°C	104		
			T _J =150°C	105		

Q _{rr}	Reverse Recovery Charge		T _J =25°C	10.2	μC
			T _J =125°C	16.8	
			T _J =150°C	19.2	
E _{rec}	Reverse Recovery Energy	I _F =100A, -diF/dt =1911A/μs(T _J =150°C), V _R =600V, V _{GE} =-15V	T _J =25°C	4.83	mJ
			T _J =125°C	7.92	
			T _J =150°C	9.13	
R _{θJC}	Diode Thermal Resistance: Junction-To-Case			0.34	°C/W

IGBT, Brake-Chopper Maximum Rated Values (T_C=25°C unless otherwise specified)

V _{CES}	Collector-Emitter Blocking Voltage	T _C =25°C	1200	V
V _{GES}	Gate-Emitter Voltage		±20	V
I _C	Continuous Collector Current	T _C =100°C	50	A
		T _C =25°C	100	A
I _{CM(1)}	Peak Collector Current Repetitive	T _J =150°C	100	A
t _{SC}	Short Circuit Withstand Time		>10	μs
P _D	Maximum Power Dissipation (IGBT)	T _C =25°C T _{Jmax} =175°C	398	W

Electrical Characteristics of IGBT (T_C=25°C unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min	Typ	Max	Unit
V _{GE(th)}	Gate-Emitter Threshold Voltage	I _C =1 mA, V _{CE} =V _{GE}	5.0	5.6	6.6	V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =50A, V _{GE} =15V	T _J =25°C	1.70	2.00	V
			T _J =125°C	1.90		V
			T _J =150°C	1.90		
I _{CES}	Collector-Emitter Leakage Current	V _{GE} =0V, V _{CE} =V _{CES} , T _J =25°C			1	mA
I _{GES}	Gate-Emitter Leakage Current	V _{GE} =±20V, V _{CE} =0V, T _J =25°C			100	nA

C_{ies}	Input Capacitance	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz$	3.65	nF
C_{oes}	Output Capacitance		0.50	nF
C_{res}	Reveres Transfer Capacitance		0.31	nF

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600V, I_C=50A,$ $R_{Gon}=15\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^\circ C$	154	ns
			$T_J=125^\circ C$	169	
			$T_J=150^\circ C$	174	
t_r	Rise Time	$V_{CC}=600V, I_C=50A,$ $R_{Gon}=15\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^\circ C$	51	ns
			$T_J=125^\circ C$	54	
			$T_J=150^\circ C$	56	
$t_{d(off)}$	Turn-off Delay Time	$V_{CC}=600V, I_C=50A,$ $R_{Goff}=15\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^\circ C$	202	ns
			$T_J=125^\circ C$	216	
			$T_J=150^\circ C$	225	
t_f	Fall Time	$V_{CC}=600V, I_C=50A,$ $R_{Goff}=15\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^\circ C$	220	ns
			$T_J=125^\circ C$	379	
			$T_J=150^\circ C$	407	
E_{on}	Turn-on Switching Loss	$V_{CC}=600V, I_C=50A,$ $R_{Gon}=15\Omega, V_{GE}=\pm 15V,$ $di/dt=791A/\mu s(T_J=150^\circ C),$ Inductive Load	$T_J=25^\circ C$	3.37	mJ
			$T_J=125^\circ C$	5.10	
			$T_J=150^\circ C$	5.53	
E_{off}	Turn-off Switching Loss	$V_{CC}=600V, I_C=50A,$ $R_{Goff}=15\Omega, V_{GE}=\pm 15V,$ $du/dt=3488V/\mu s(T_J=150^\circ C),$ Inductive Load	$T_J=25^\circ C$	2.42	mJ
			$T_J=125^\circ C$	4.09	
			$T_J=150^\circ C$	4.52	
Q_g	Total Gate Charge	$V_{GE}=+15V \dots -15V$	$T_J=25^\circ C$	504	nC
$R_{g \text{ internal}}$	Internal Gate Resistance		$T_J=25^\circ C$	4	Ω
RBSOA	$I_C=100A, V_{CC}=1050V, V_p=1200V, R_{Goff}=15\Omega, V_{GE}=+15V \text{ to } 0V, T_J=150^\circ C$			Trapezoid	
SC data	$V_{CC}=600V, t_p=10\mu s, V_{GE}=\pm 15V, R_{Gon}=15\Omega, R_{Goff}=15\Omega, T_J=25^\circ C$			297	A
$R_{\theta JC}$	IGBT Thermal Resistance: Junction-To-Case			0.38	$^\circ C/W$

Diode, Brake-Chopper
Maximum Rated Values ($T_C=25^\circ\text{C}$ unless otherwise specified)

V_{RRM}	Repetitive Peak Reverse Voltage	1200	V
I_F	Diode Continuous Forward Current	35	A
I_{FM}	Peak FWD Current Repetitive	70	A

Electrical Characteristics of FWD ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Description	Conditions	Min	Typ	Max	Unit
V_{FM}	Forward Voltage	$I_F=35\text{A}$	$T_J=25^\circ\text{C}$	1.90		V
			$T_J=125^\circ\text{C}$	2.00		
t_{rr}	Reverse Recovery Time		$T_J=25^\circ\text{C}$	137		ns
			$T_J=125^\circ\text{C}$	269		
I_{rr}	Peak Reverse Recovery Current	$I_F=35\text{A}$, $-di_F/dt=816\text{A}/\mu\text{s}(T_J=125^\circ\text{C})$, $V_{rr}=600\text{V}$, $V_{GE}=-15\text{V}$	$T_J=25^\circ\text{C}$	20		A
			$T_J=125^\circ\text{C}$	25		
Q_{rr}	Reverse Recovery Charge		$T_J=25^\circ\text{C}$	3.15		μC
			$T_J=125^\circ\text{C}$	5.05		
E_{rec}	Reverse Recovery Energy		$T_J=25^\circ\text{C}$	1.24		mJ
			$T_J=125^\circ\text{C}$	2.12		
$R_{\theta JC}$	Diode Thermal Resistance: Junction-To-Case			0.70		$^\circ\text{C}/\text{W}$

Diode, Rectifier
Maximum Rated Values ($T_C=25^\circ\text{C}$ unless otherwise specified)

V_{RRM}	Repetitive Peak Reverse Voltage	$T_J=25^\circ\text{C}$	1800	V
I_{FRMSM}	Maximum RMS Forward Current Per Chip	$T_J=80^\circ\text{C}$	130	A
I_{RMSM}	Maximum RMS Current At Rectifier Output	$T_J=80^\circ\text{C}$	180	A
I_{FSM}	Surge Current @ $t_p=10$ ms	$T_J=25^\circ\text{C}$	1500	A
		$T_J=150^\circ\text{C}$	1150	
I^2t	I^2t - Value	$T_J=25^\circ\text{C}$	11560	A ² s
		$T_J=150^\circ\text{C}$	6610	

Electrical Characteristics of Diode ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Description	Conditions	Min	Typ	Max	Unit
V_F	Forward Voltage	$I_F=85$ A	$T_J=25^\circ\text{C}$		1.00	V
			$T_J=125^\circ\text{C}$		0.90	
			$T_J=150^\circ\text{C}$		0.90	
I_R	Reverse Current	$V_R=1800$ V	$T_J=25^\circ\text{C}$		1	mA
$R_{\theta JC}$	IGBT Thermal Resistance: Junction-To-Case			0.29		$^\circ\text{C}/\text{W}$

Internal NTC-Thermistor Characteristics

R_{25}	$T_C=25^\circ\text{C}$	5		k Ω
$\Delta R/R$	$T_C=100^\circ\text{C}$, $R_{100}=481\Omega$		± 5	%
P_{25}	$T_C=25^\circ\text{C}$	50		mW
$B_{25/50}$	$R_2=R_{25} \exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$	3380		K
$B_{25/80}$	$R_2=R_{25} \exp[B_{25/80}(1/T_2-1/(298.15\text{K}))]$	3440		K

Module

Symbol	Description	Conditions	Min	Typ	Max	Unit
V _{iso}	Isolation Voltage (All Terminals Shorted)	f = 50Hz, 1minute	2500			V
T _J	Maximum Junction Temperature				175	°C
T _{JOP}	Maximum Operating Junction Temperature Range		-40		+150	°C
T _{stg}	Storage Temperature		-40		+125	°C
CTI	Comparative Tracking Index		200			V
R _{eCS}	Case-To-Sink Thermally (Conductive Grease Applied)			0.1		°C/W
M	Power Terminals Screw:M5		3.0		5.0	N·m
G	Weight			300		g

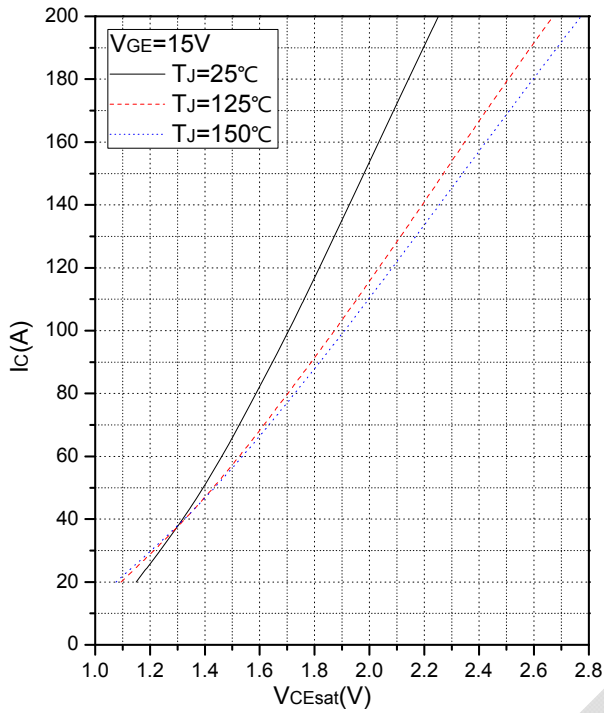


Fig.1 Typical Saturation Voltage Characteristics (Inverter)

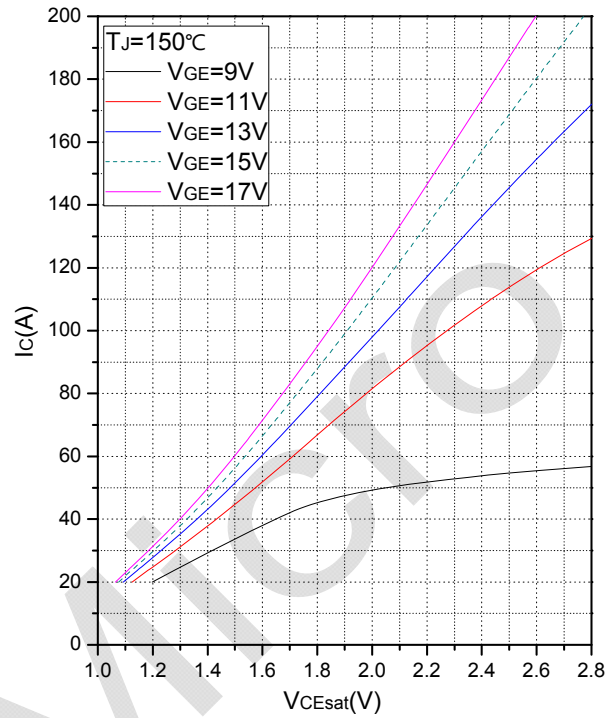


Fig.2 Typical Output Characteristics (Inverter)

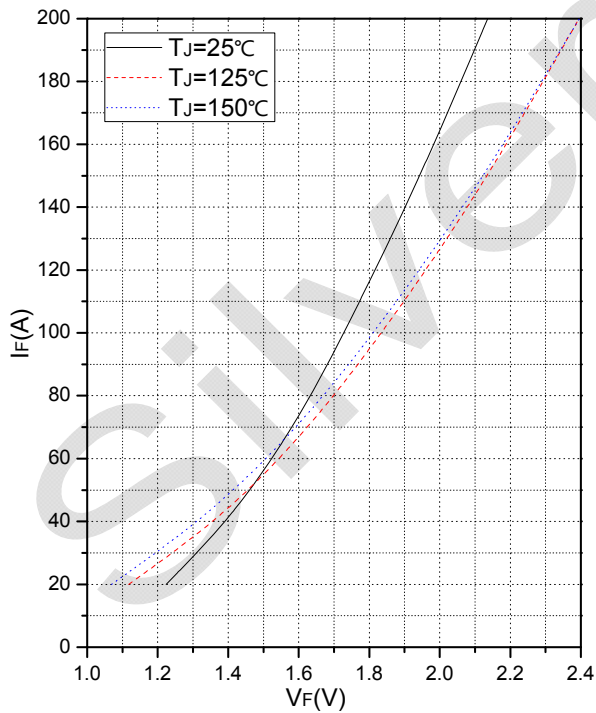


Fig.3 Forward Characteristics of FWD (Inverter)

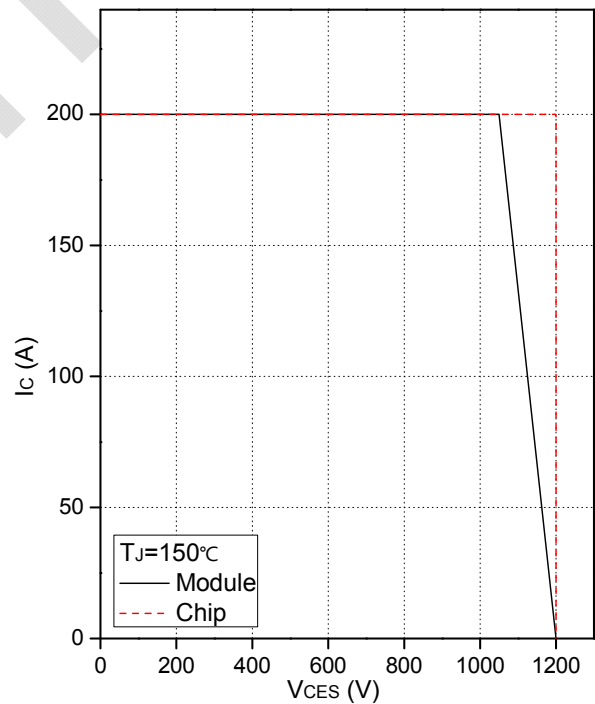


Fig.4 Reverse Bias Safe Operation Area (RBSOA)

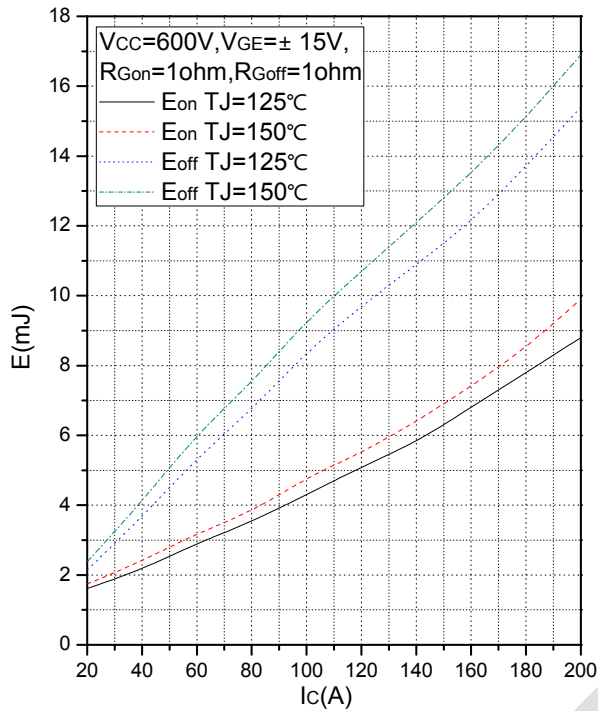


Fig.5 Typical Switching Loss vs. Collector Current (Inverter)

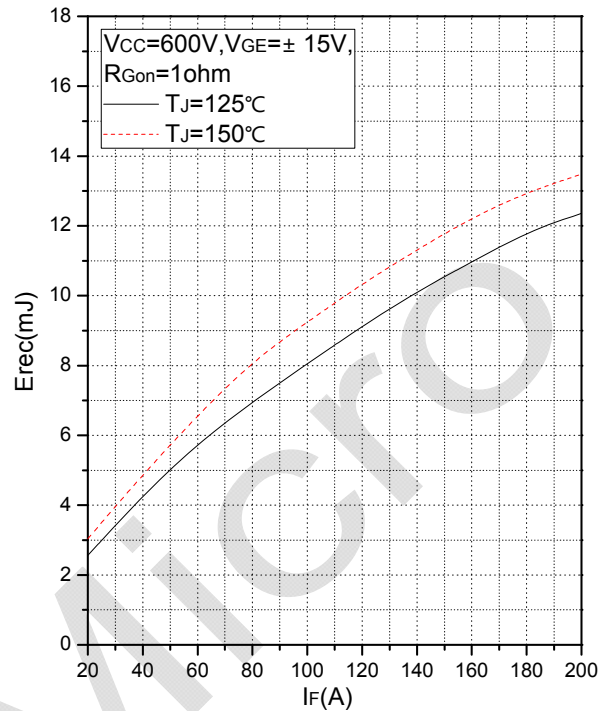


Fig.6 Typical Switching Loss vs. Forward Current (Inverter)

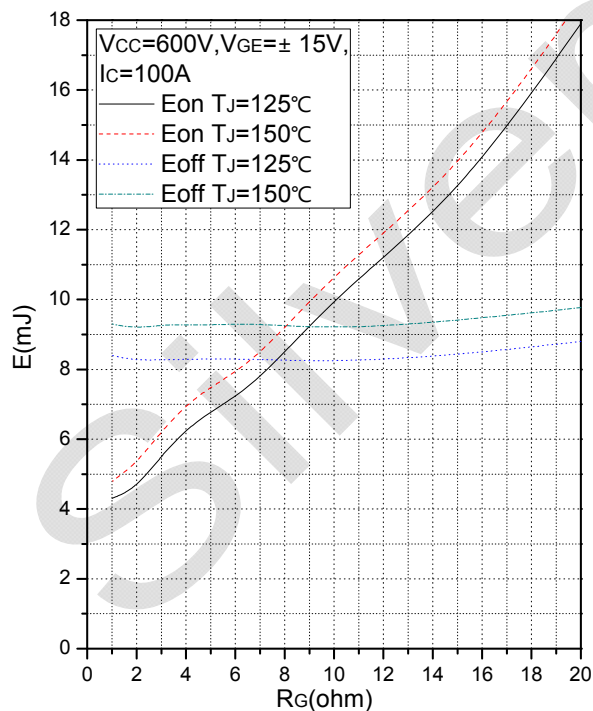


Fig.7 Typical Switching Loss vs. Gate Resistance (Inverter)

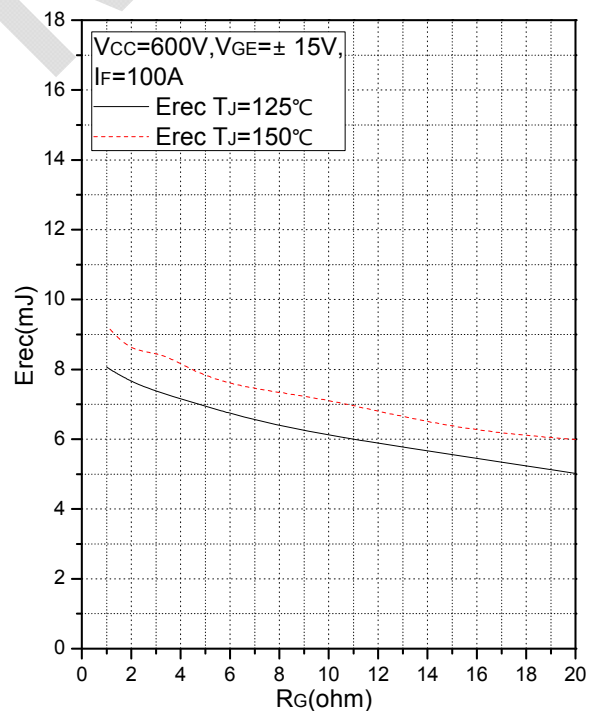


Fig.8 Typical Switching Loss vs. Gate Resistance (Inverter)

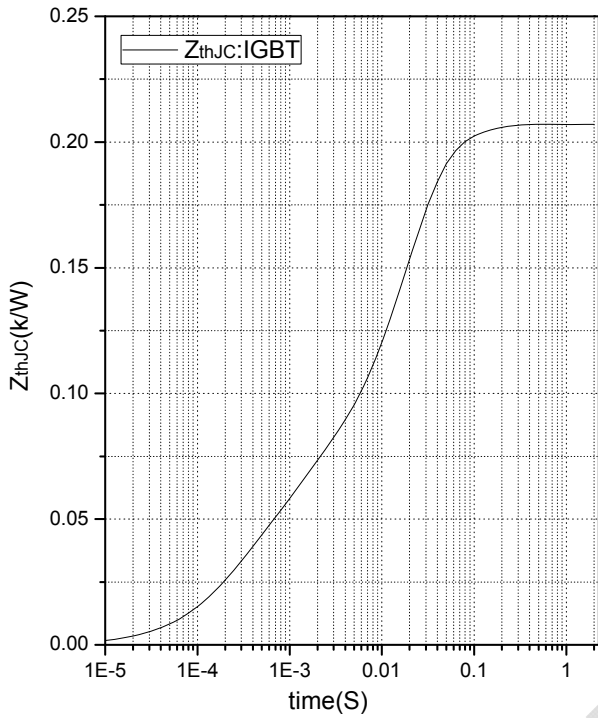


Fig.9 Transient Thermal Impedance (Inverter- IGBT)

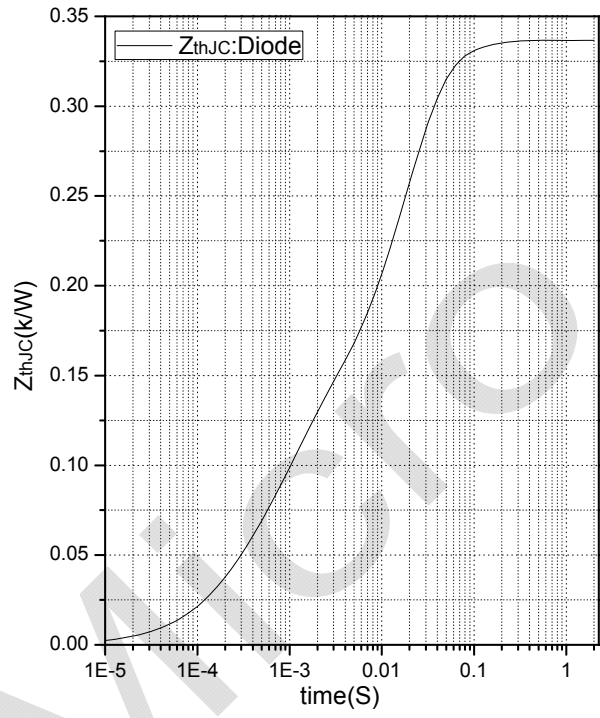


Fig.10 Transient Thermal Impedance (Inverter- Diode)

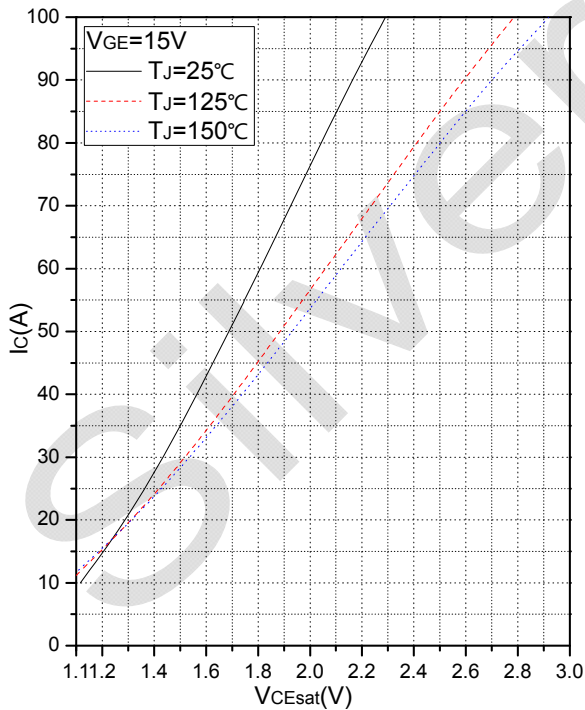


Fig.11 Typical Saturation Voltage Characteristics (Brake-Chopper)

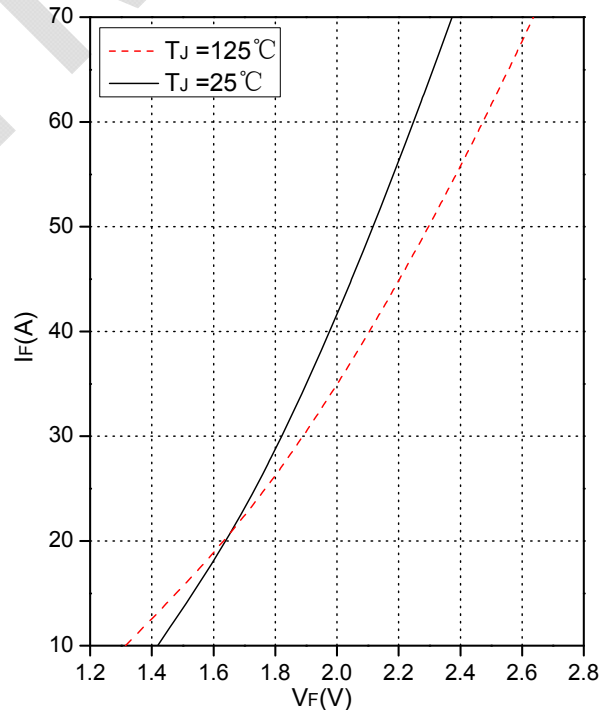


Fig.12 Forward Characteristics of FWD (Brake-Chopper)

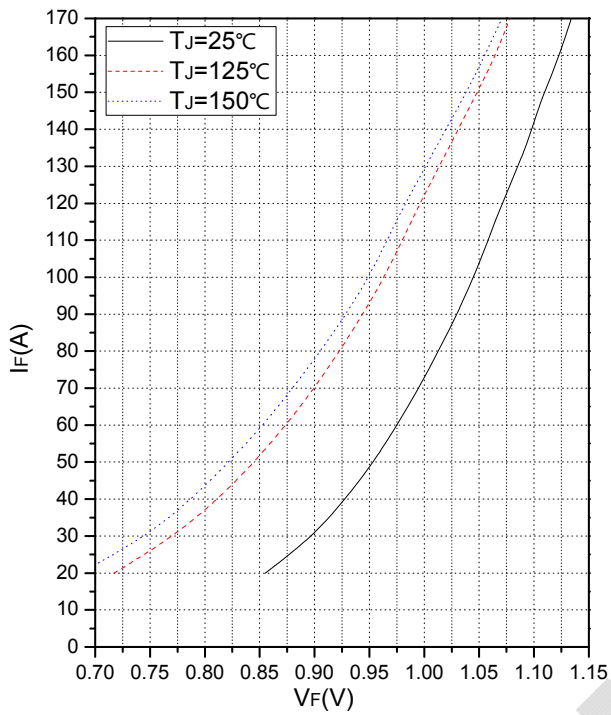


Fig.13 Forward Characteristics of Diode (Rectifier)

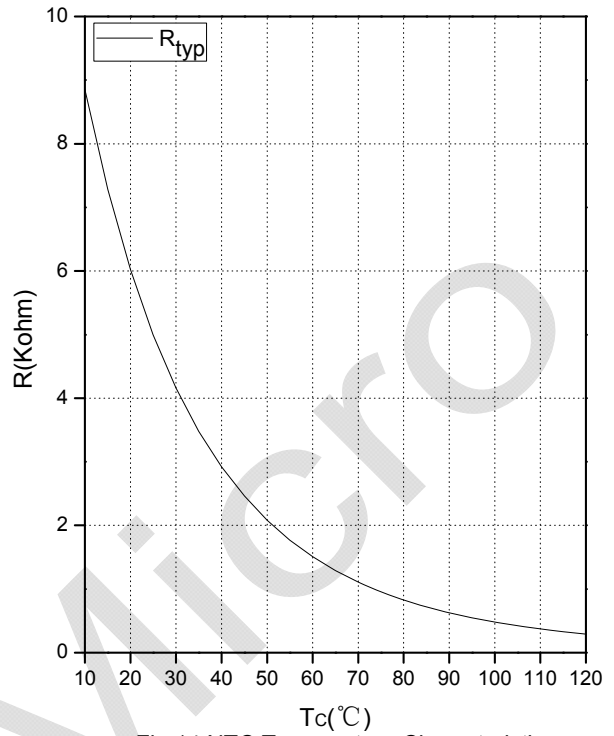


Fig.14 NTC Temperature Characteristics



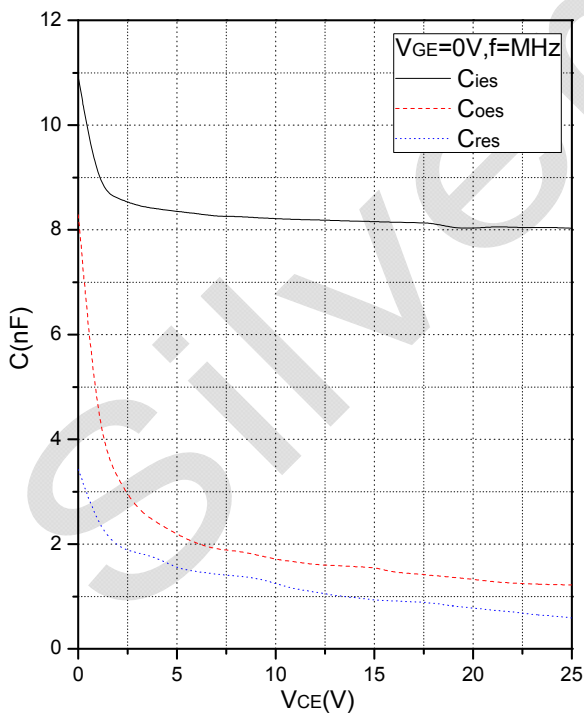


Fig.15 Capacitance Characteristics

Internal Circuit:

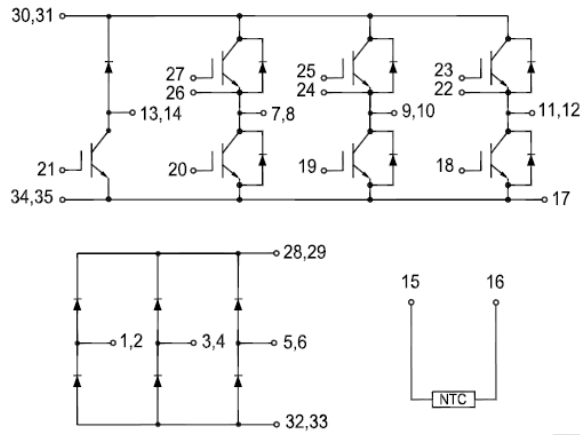

Package Outline (Unit: mm):

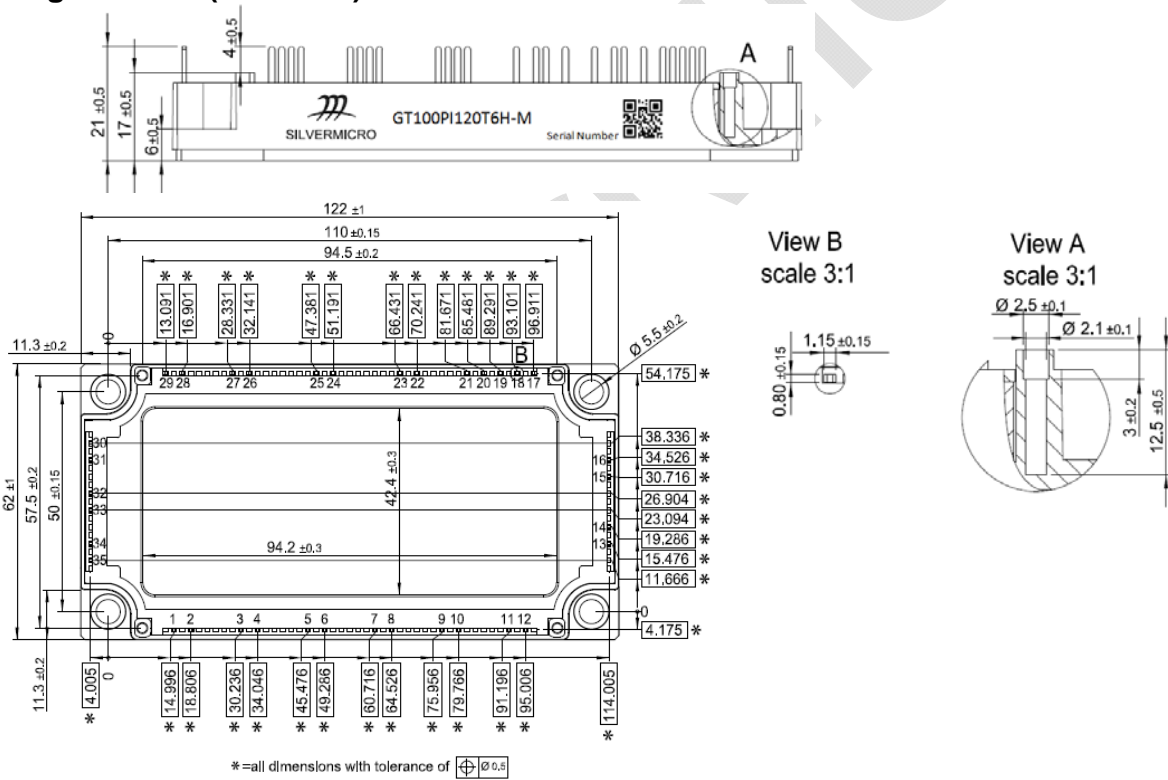



Date	Revision	Notes
05/23/2018	01	Initial release
09/11/2019	A	Final Version

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.